


Nylon Web Bridles



Heavy Duty Nylon Web Bridle (One Leg)

(Inches)	(PLY)	RATED CAPACITY IN POUNDS 90° *	RATED CAPACITY IN POUNDS 60° *	RATED CAPACITY IN POUNDS 45° *	RATED CAPACITY IN POUNDS 30° *	Master Link Diameter (CP)	Master Link Diameter (OB)	Hook (In Tons)	Shackle Size in Inches
1"	1	1600	1300	1100	800	5/8"	1/2"	1T	3/8"
1"	2	3000	2700	2200	1600	5/8"	1/2"	1.5T	1/2"
1"	3	4000	3500	2800	2000	5/8"	1/2"	2T	1/2"
1"	4	5000	4700	3800	2700	5/8"	1/2"	3T	5/8"
2"	1	3000	2700	2200	1600	5/8"	1/2"	1.5T	1/2"
2"	2	6000	5500	4400	3200	3/4"	3/4"	3T	5/8"
2"	3	8000	7000	5700	4100	--	3/4"	4.5T	3/4"
2"	4	10000	9400	7700	5500	--	3/4"	7T	1"

Heavy Duty Nylon Web Bridle (Two Leg)

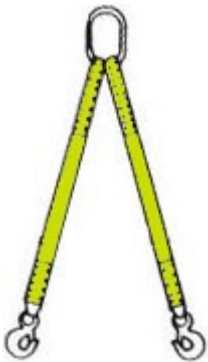

Inches	PLY	RATED CAPACITY IN POUNDS 90° *	RATED CAPACITY IN POUNDS 60° *	RATED CAPACITY IN POUNDS 45° *	RATED CAPACITY IN POUNDS 30° *	Master Link Diameter (OB)	Hook (In Tons)	Shackle Size in Inches
1"	1	3200	2700	2200	1600	1/2"	1T	3/8"
1"	2	6000	5400	4400	3200	3/4"	1.5T	1/2"
1"	3	8700	7000	5700	4100	3/4"	2T	1/2"
1"	4	10000	9400	7700	5500	3/4"	3T	5/8"
2"	1	6000	5400	4400	3200	3/4"	1.5T	1/2"
2"	2	12000	11000	8900	6400	1"	3T	5/8"
2"	3	16000	14000	11400	8200	1"	4.5T	3/4"
2"	4	20000	18800	15400	11000	1"	7T	1"

Heavy Duty Nylon Web Bridle (Four Leg)



Inches	PLY	RATED CAPACITY IN POUNDS 90° *	RATED CAPACITY IN POUNDS 60° *	RATED CAPACITY IN POUNDS 45° *	RATED CAPACITY IN POUNDS 30° *	Master Link Diameter (OB)	Hook (In Tons)	Shackle Size in Inches
1"	1	6000	5100	4200	3000	3/4"	1T	3/8"
1"	2	12000	10500	8400	6000	1"	1.5T	1/2"
1"	3	15000	12900	10500	7500	1"	2T	1/2"
1"	4	20000	18900	15400	11000	1"	3T	5/8"
2"	1	12000	10500	8400	6000	1"	1.5T	1/2"
2"	2	24000	21500	17500	12500	1 1/4"	3T	5/8"
2"	3	30000	27500	22400	16000	1 1/4"	4.5T	3/4"
2"	4	40000	38000	30800	22000	1 1/4"	7T	1"